

 **Cavity Sliders™**

# CS Cavity Slider® Pocket Door Frame



# Pocket Frame Systems



The CS Cavity Slider® is a practical solution for those areas where there is not enough space for a swinging door.

In addition to its space saving attributes in restrooms, hallways, and laundries, it can be used with confidence for architectural feature openings around your project.


## Features

- Structurally robust due to its construction from aluminum extrusions
- Easy to assemble and install
- Available for 2x4 and 2x6 framing
- Can be cut down to size on site
- Suitable for residential and commercial projects (meets Type 1 construction code without any combustible materials)

## Rough Opening

DH - Door Height    DW - Door Width

Dimension	Inches
RO Height	DH + 4-1/4"
RO Width   Single	(DW x 2) + 2"
RO Width   Bi-Parting	(DW x 4) + 2"

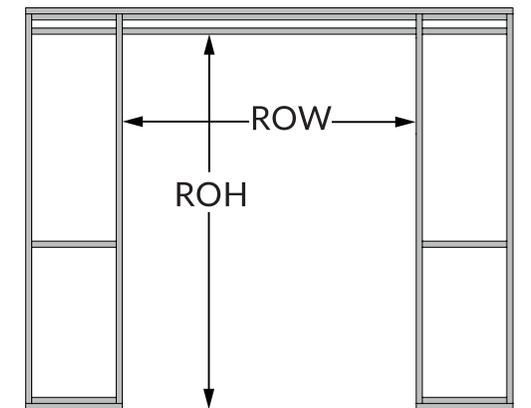

**WE ARE A STOCKING DEALER. WE WILL PLACE SPECIAL ORDERS FOR ALL CAVITY SLIDERS PRODUCTS AND PARTS. *STOCK ITEMS BELOW IN RED***

## How to Order

### 1. Choose Framing and Door Size

Frames can be cut down on site to maximize size for each model:

Framing	CS SKU	Max Door Size	
		Inches	Millimeter
4" Framing (2x4 Stud)*	<b>CSS4K3068</b>	3'0" x 6'8"	914 x 2032mm
	<b>CSS4K3080</b>	3'0" x 8'0"	914 x 2438mm
	CSS4K4080	4'0" x 8'0"	1219 x 2438mm
	CSU6K2680	2'6" x 8'0"	762 x 2438mm
6" Framing (2x6 Stud)	<b>CSU6K3080</b>	3'0" x 8'0"	914 x 2438mm
	CSU6K4080	4'0" x 8'0"	1219 x 2438mm
	CSU6K3090	3'0" x 9'0"	914 x 2743mm
	CSU6K4090	4'0" x 9'0"	1219 x 2743mm
	CSU6K30100	3'0" x 10'0"	914 x 3048mm
	CSU6K40100	4'0" x 10'0"	1219 x 3048mm
	CSU6K50100	5'0" x 10'0"	1524 x 3048mm

\* More sizes available through distribution. Reach out for more information

### 2. Choose a Carriage Pack (one per door)

Includes: Carriages, mounting plates, T-Guide, fixing screws, and adjusting wrench

Standard	M6 (200lb / 90kg)	
	M8 (500lb / 240kg)	
	Minimum Door Width	
CS SofStop	No Stop	1 Stop
0 - 200 lb (90kg)	23" (584mm)	26" (660mm)
CS SofStop HD	No Stop	1 Stop
0 - 350 lb (160kg)	26" (660mm)	29" (737mm)

# CS Cavity Slider® Features



**Smooth running carriages**  
with encased ball bearings.  
Up to 500lb (240kg) capacity

**SofStop Soft Close/Soft Open**  
also available



**Corner joining brackets** ensure precise right angled assembly



**T-joining brackets** for easy assembly of slats to split jambs & back stud

**Horizontal slats** for added strength

**Split Jambs and slats** use hollow core technology for superior rigidity

**Door Thickness**

1-3/8" to 1-3/4"  
2x4 Stud

1-3/8" to 2-1/4"  
2x6 Stud

**Strong aluminum frame** complies with Type 1 Construction



**2x4**



**2x6**

**Extruded aluminum track** incorporated into head unit



**Trim Clips** for quick & easy trim fitting

Compatible with 4" and 6" stud sizes

**Bottom plate assembly**



**Adjustable T-Guide**

Patent Pending



Cycle tested 1 million openings



ADA Compliant



Available with SofStop®



Single or Bi-Parting units



Maximum door weight

Instructions/  
Instrucciones




# CS Cavity Slider® Pocket Door Frame

## Features

- Accommodates 1-3/8" to 1-3/4" doors (35 to 44.5mm)
- Up to 4'0" x 8'0" door size (1220 x 2438mm) and can be cut down on site
- Designed for 2x4 Stud Size


## Product Specifications

### Elevation

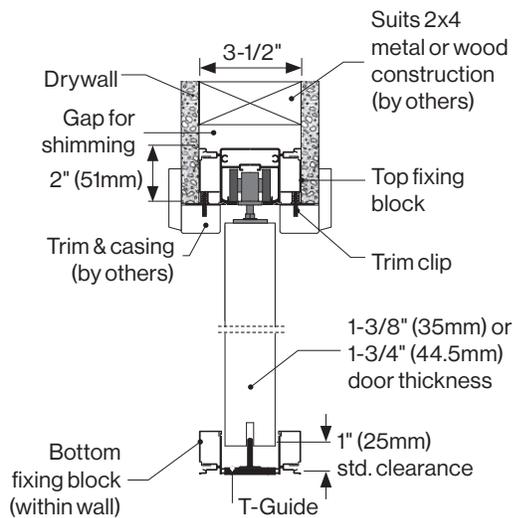

## Technical Specifications

### Plan

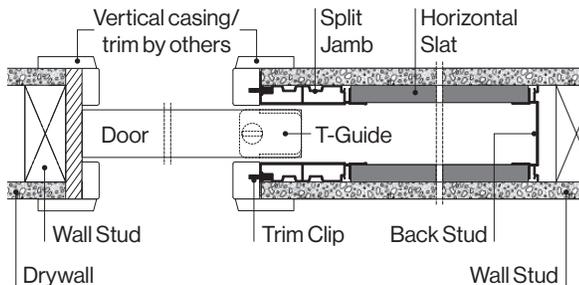

© All copyright and other property in this document is reserved by Cavity Sliders USA Inc. Details and specifications are subject to change without notice. Whilst all care is taken to ensure the accuracy of all information, no responsibility will be accepted for any errors or omissions. 09/2024

**CavitySliders.com**


sales@cavitysliders.com

(888) 466-0030

# CS Cavity Slider® Ultimate Pocket Door Frame

- The gold standard of pocket frames. It is the largest and most robust manufactured pocket frame on the market
- Accommodates 1-3/8" to 2-1/4" doors (35 to 57mm)
- Up to 5'0" x 10'0" door size (1524 x 3048mm) and can be cut down on site
- Designed for 2x6 Stud Size

### Elevation

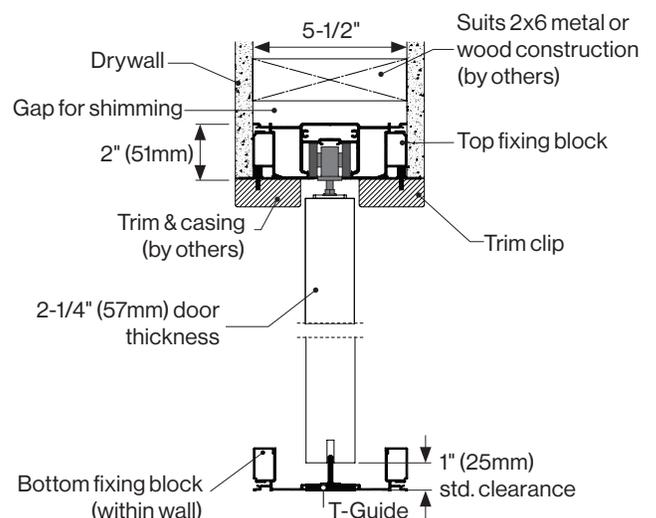

## Standard CS Track Features

- Heavy duty one-piece extruded aluminum track.
- Minimal clearance means the carriages/wheels cannot jump off the track or jam.
- Large diameter wheels with precision ground bearings make for smooth running.
- Radiused track reduces friction and allows dust to be pushed into the gutters so the door always slides smoothly.
- M8 body made from cast stainless steel for strength and reliability. 4-wheel carriages are standard on all doors over 200lb.
- CarriSnap™ quick release system allows the door to be removed easily from the track; no need to unscrew anything and lose door height adjustment.

Specs and Instructions

